



DESIGN "V"(VERTICAL)

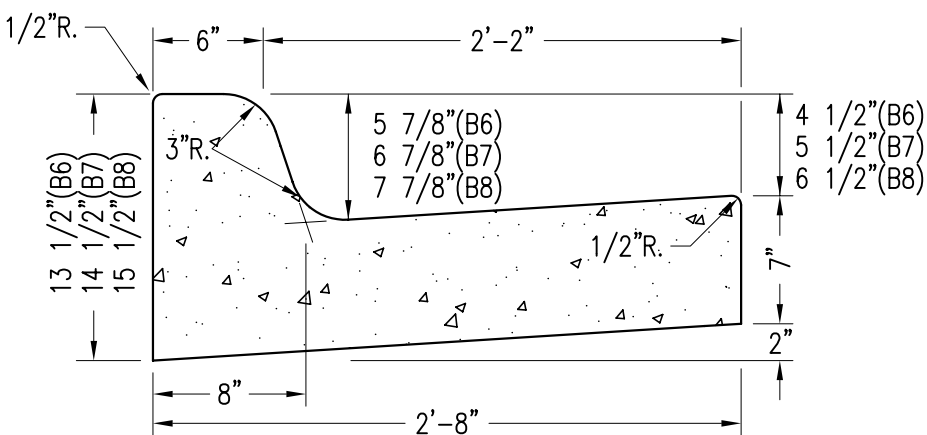

DESIGN "B"(BATTERFACE)

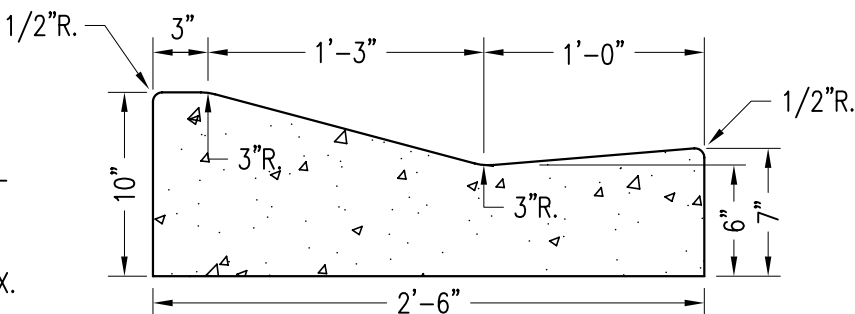

DESIGN "D"(DRIVEOVER)

NOTES

1. CONCRETE MIX: MANUAL PLACEMENT-MN/DOT SPEC. 3A32, SLIP-FORM PLACEMENT-MN/DOT SPEC. 3A22.
2. PROVIDE 1/2" EXP. JT. AT 300' MAX. SPACING AND TO MATCH PAVEMENT EXP. JTS. IN ADDITION TO EXP. JTS. SHOWN ON OTHER DETAIL PLATES.
3. PROVIDE CONTRACTION JTS. @ 9' MAX. SPACING, SAW CUT 2" MIN. DEPTH.
4. ALL CONC. C. & G. SHALL BE PLACED ON A MIN. OF 4" CLASS II AGGREGATE BASE.
5. SILL REQUIRED FOR DESIGN "V" AND "B", WHEREVER SIDEWALK ABUTS CURB. SEE S.D.P. 2-02.

DEPARTMENT OF PUBLIC WORKS
CITY OF ROCHESTER, MINNESOTA

CONCRETE CURB & GUTTER

Donald Nelson
ASST. CITY ENGINEER

Paul W. Finner
DIRECTOR

SHT 1 OF 1 SHTS

DATE REVISED
3/22/06

PLATE NO.
2-01

REV.
C